


INPUT AND F
ALL CAPACIT
ALL RESISTO
INDICATI
VOLTAGES T
VOLTAGES M
INPUT SELEC
FUNCTION SE
OUTPUTS LO
INDICAT
ALL READIN

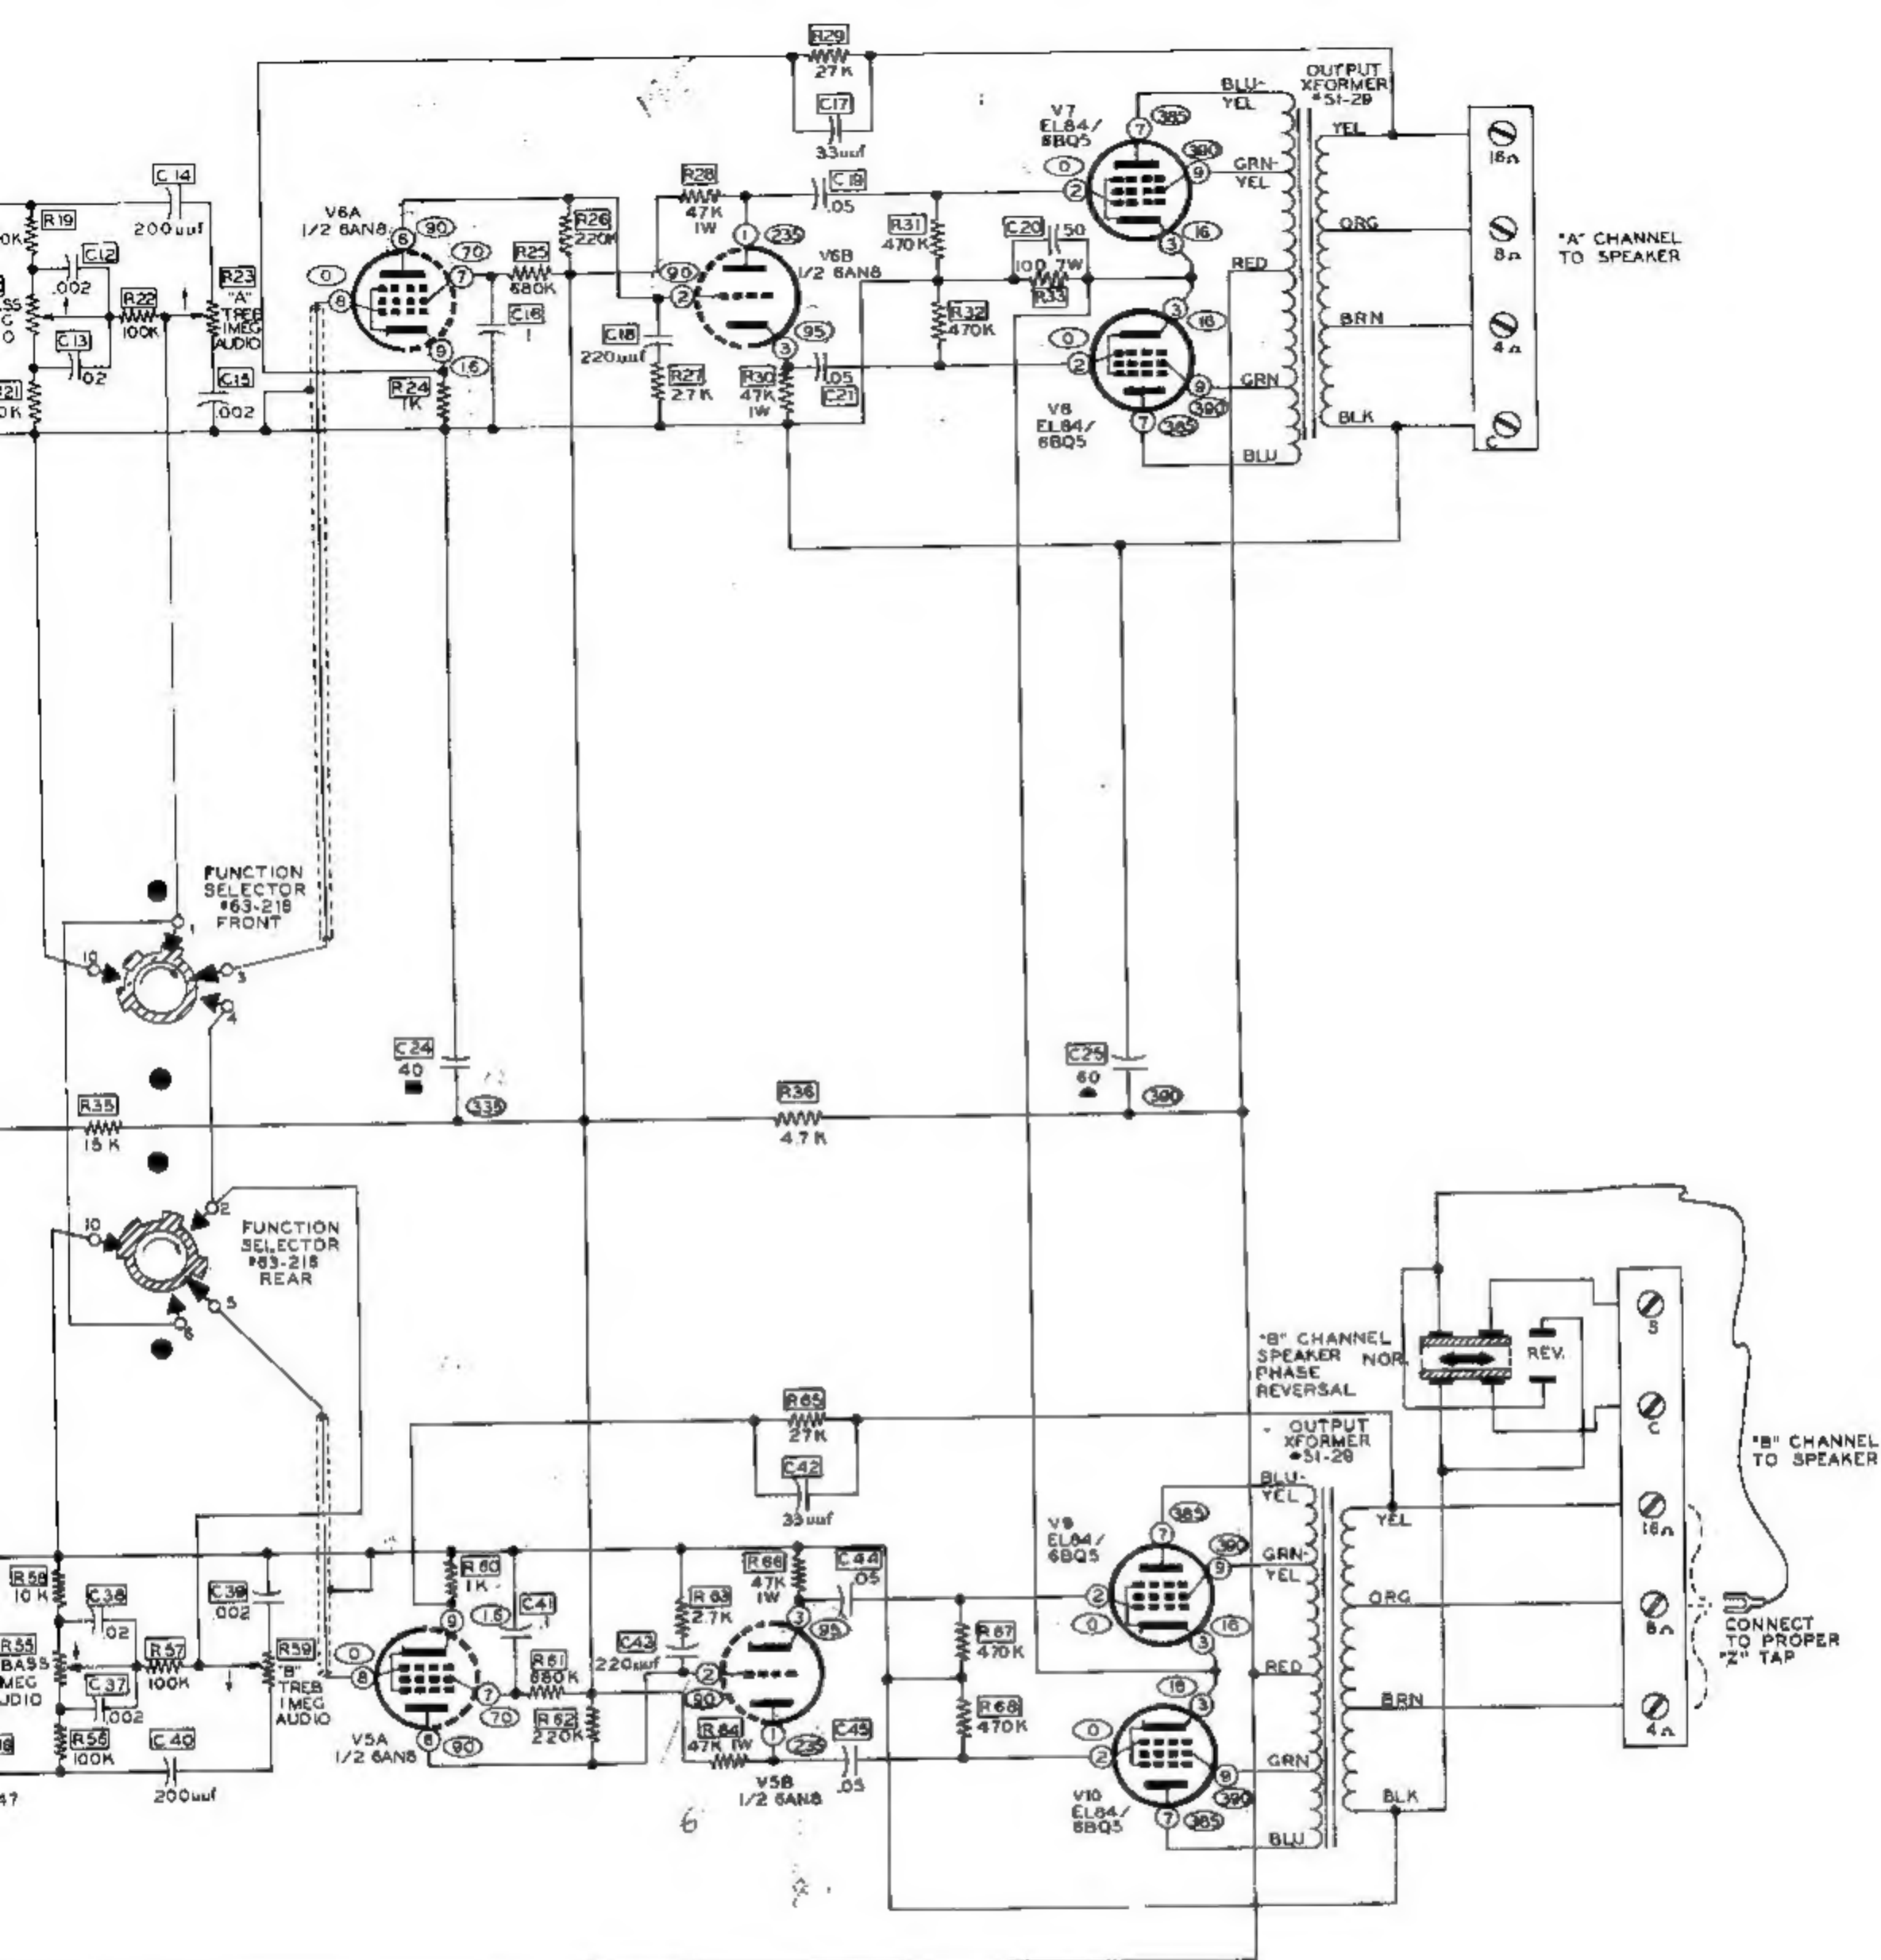

NOTES

INPUT AND FUNCTION SELECTORS SHOWN IN FULL CCW POSITION VIEWED FROM FRONT PANEL.
 ALL CAPACITORS IN μ F UNLESS OTHERWISE SPECIFIED.
 ALL RESISTORS 1/2 WATT UNLESS OTHERWISE SPECIFIED.
 → INDICATES CLOCKWISE TRAVEL.
 VOLTAGES TAKEN WITH HEATHKIT VTVM, 117 V AC LINE SOURCE.
 VOLTAGES MAY VARY $\pm 10\%$ DUE TO TOLERANCE OF COMPONENTS.
 INPUT SELECTOR IN AUX POSITION, VOLUME FULL CCW, BASS AND TREBLE 1/2 TOTATION,
 FUNCTION SELECTOR IN STEREO POSITION FOR VOLTAGE READINGS.
 OUTPUTS LOADED WITH 16Ω 20 W RESISTORS.
 ○ INDICATES VOLTAGE READING.
 ALL READINGS FROM TEST POINT TO COMMON GROUND.

HEATHKIT STEREO AMPLIFIER MODEL 5A-2